AMENDMENTS TO THE CLAIMS

2

- 1. (Previously Presented) A composition, comprising:
- a ladder polymer or ladder oligomer, said ladder polymer or oligomer comprising an iptycene, wherein the ladder polymer or oligomer is a polymer or oligomer having a backbone that can only be severed by breaking at least two bonds.
- 2. (Previously Presented) A composition as in claim 1, having a molecular weight in excess of 2000 daltons, comprising a shape persistent molecule containing bridgehead atoms, with molecular structures radiating from the bridgehead atoms in three directions and extending outwardly therefrom such that each defines a van der Waals contact of furthest point from the bridgehead atoms of no less than 3.5 Å, the composition having a dielectric constant of less than 3.0.
- 3. (Original) A composition as in claim 2, comprising a linear polymer comprising an iptycene.
- 4. (Original) A composition as in claim 2, arranged as a dielectric material in an electronic component.
- 5. (Original) A composition as in claim 2, wherein the molecular structures that radiate from the bridgehead atoms extend outwardly therefrom such that each defines a van der Waals contact of furthest point from the bridgehead atoms of no less than 4.0 Å.
- 6. (Original) A composition as in claim 2, wherein the molecular structures that radiate from the bridgehead atoms extend outwardly therefrom such that each defines a van der Waals contact of furthest point from the bridgehead atoms of no less than 4.5 Å.
- 7. (Original) A composition as in claim 2, wherein the molecular structures that radiate from the bridgehead atoms extend outwardly therefrom such that each defines a van der Waals contact of furthest point from the bridgehead atoms of no less than 5.0 Å.

Reply to Office Action of September 26, 2007

8. (Original) A composition as in claim 2, wherein the molecular structures that radiate from

the bridgehead atoms extend outwardly therefrom such that each defines a van der Waals contact of

Docket No.: M0925.70094US01

furthest point from the bridgehead atoms of no less than 5.5 Å.

9. (Original) A composition as in claim 2, wherein the molecular structures that radiate from

the bridgehead atoms extend outwardly therefrom such that each defines a van der Waals contact of

furthest point from the bridgehead atoms of no less than 6.0 Å.

10. (Original) A composition as in claim 2, wherein the molecular structures that radiate from

the bridgehead atoms extend outwardly therefrom such that each defines a van der Waals contact of

furthest point from the bridgehead atoms of no less than 6.2 Å.

11. (Original) A composition as in claim 1, having a lowest energy state in which the polymer

has a backbone the contains a plane.

12. (Original) A composition as in claim 11, including a plurality of aromatic rings that each

align normal to the plane in the lowest energy state, and the polymer has a minimum dimension,


measured as van der Waals contact dimensions, of 6.0 Å.

13. (Original) A composition as in claim 1, the polymer including a backbone comprising

backbone atoms bonded to other backbone atoms, wherein bonds involving the backbone atoms are

not freely rotatable.

14. (Previously Presented) A composition as in claim 1, comprising a structure:

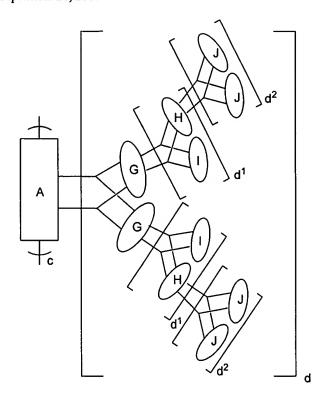

wherein A, G, H, I, and J are aromatic groups; c is less than 10,000; d = 1, 2, and $d^1 = 0$, 1, such that when $d^1 = 0$, $d^2 = 0$ and when $d^1 = 1$, $d^2 = 0$ or 1.

- 15. (Original) A composition as in claim 2, wherein the bridgehead atoms comprise carbon or nitrogen.
- 16. (Original) A composition as in claim 1 where in the backbone is composed of triptycene units.
- 17. (Original) A composition as in claim 2 comprising a branched structure.
- 18. (Original) A composition as in claim 2 comprising a hyperbranched structure.
- 19. (Original) A composition as in claim 18, comprising polymer chain units comprising chemical functionality allowing formation of grafts.

20. (Original) A composition as in claim 18, comprising a grafted polymer including non-iptycene units grafted onto polymer chain units.

Docket No.: M0925.70094US01

- 21. (Original) A composition as in claim 18, comprising a grafted polymer including iptycene units grafted onto polymer chain units.
- 22. (Original) A composition as in claim 18, comprising a polymer of monomer units each including two reactive sites, one of which has reacted with another monomer unit to form the polymer backbone, and another of which is available for grafting after formation of the polymer.
- 23. (Original) A composition as in claim 1 comprising a dendritic structure.
- 24. (Original) A composition as in claim 1 wherein the polymer has cyclic sub-units.
- 25. (Original) A composition as in claim 1 which, in a solid state, has at least 30% free volume and a dielectric constant of about 1.9 or less.
- 26. (Original) A composition as in claim 1 which, in a solid state, has at least 50% free volume and a dielectric constant of about 1.7 or less.
- 27. (Original) A composition as in claim 1 which, in a solid state, has at least 70% free volume and a dielectric constant of about 1.5 or less.
- 28. (Original) A composition as in claim 1 which, in a solid state, has at least 90% free volume and a dielectric constant of about 1.2 or less.
- 29. (Original) A composition as in claim 2 wherein the polymer has a backbone defined by non-iptycene units, and comprises iptycene units connected to the backbone.

30. (Original) A composition as in claim 1, comprising a first porous polymeric component and further comprising a second polymeric component forming an interpenetrating network permeating the pores of the first porous polymeric component.

6

- 31. (Previously Presented) A composition comprising a first, porous, shape persistent polymer and a second, flexible polymer forming an interpenetrating network, the second polymer permeating the pores of the first polymer, wherein the first polymer and the second polymer have different structures and are not covalently bound to each other.
- 32. (Original) A composition as in claim 31 wherein the second component is an elastomer.
- 33. (Original) A composition as in claim 31 wherein the second component is a conjugated. polymer.
- 34. (Original) A composition as in claim 31 wherein the material shows a negative Poisson's ratio when elongated.
- 35. (Previously Presented) A device comprising:
 - a chromophore; and
 - a shape-persistent molecule having at least 20% free volume;

the device constructed and arranged to be capable of moving the chromophore from a first orientation to a second orientation upon application to the chromophore of a source of external energy,

wherein the source of external energy is an electric, magnetic, optical, acoustic, electromagnetic, or mechanical field.

36. (Cancelled)

37. (Original) A device as in claim 35, wherein the device is constructed and arranged to change the polarization of the chromophore's optical, magnetic, or dielectric absorptions upon application of the external energy source.

7

- 38. (Original) A device as in claim 35, constructed and arranged to display a change in color upon application of the external energy source.
- 39. (Original) A device as in claim 35, constructed and arranged to display a change in luminescence upon application of the external energy source.
- 40. (Original) A device as in claim 35, constructed and arranged to display a change in transmission of an optical signal upon application of the external energy source.
- 41. (Previously Presented) A device as in claim 35, wherein the chromophore bonded to the shape-persistent molecule can be switched from a first low-energy, stable orientation to a second, low-energy, stable orientation upon application of the external energy source.
- 42. (Original) A device as in claim 35, constructed and arranged to impart polymerization to the iptycene upon application of the external energy source.
- 43. (Original) A device as in claim 35, constructed and arranged to display a signal recognizable to a human upon application of the external energy source.
- 44. (Original) A device as in claim 43, wherein the signal is a hologram.
- 45. (Original) A device as in claim 35, wherein application of the external energy source causes switching in a liquid crystal display.

Application No. 10/764,768 Amendment dated January 28, 2008 Reply to Office Action of September 26, 2007 Docket No.: M0925.70094US01

46. (Previously Presented) A device as in claim 35, wherein the shape-persistent molecule comprises an iptycene.

8

47. (Previously Presented) A device as in claim 35, wherein the chromophore is bonded to the shape-persistent molecule.